


19" Managed Ethernet Switch RedFox-5528 Series



- **At the core of large high-performance industrial networks**
 - 28 Gigabit ports with up to 16 SFP fibre ports
 - Powerful CPU and switchcore
 - Advanced WeOS support
- **Designed for demanding Edge Network applications**
 - Various combinations of port and power options
 - Multiple network resilience solutions
 - Industrial, trackside and marine type tested
- **Robust and reliable for long service life**
 - Class-leading MTBF
 - Ultra-robust IP40 metal housing with all connectors on front
 - Only industrial grade components
- **Unique future proof industrial networking solutions**
 - Advanced cybersecurity features
 - Routing acceleration in hardware¹
 - IEEE 1588v2 Precision Time Protocol (PTP)¹

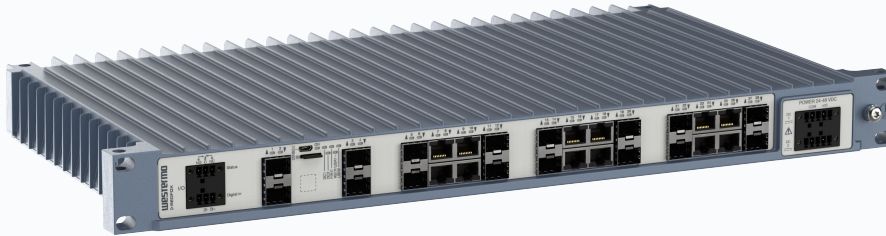

EN 50121-4
Railway Trackside

EN 61000-6-1
Residential Immunity

EN 61000-6-3
Residential Emission

EN 61000-6-4
Industrial Emission

The RedFox 5500 series is designed for the core of large high-performance industrial networks and has been developed to cater to the needs of current and future industrial data networks, combining outstanding performance, durability and reliability. These switches are ideal for handling the big data and high bandwidth requirements typically found within transportation, manufacturing, energy, smart cities and other applications.

Integrating hardware, software and network design support tools, this next generation switch platform offers advanced capabilities, the lowest total cost of ownership and will create the most reliable and resilient networks on the market.

The switch is engineered to maintain uninterrupted data communication, even in exceptionally harsh environments. The RedFox 5500 series is tested and certified to withstand extreme temperatures, vibrations and shocks. The switches only use industrial grade components which contributes towards a market leading mean time between failure (MTBF), maximized service life, and reduced operational and life cycle costs.

Various port configurations are available, all with full gigabit speed, that can be further customized with SFP transceivers. The RedFox 5500 series is available in either a DC or AC power supply as well as a configurable I/O fault contact making the switch ideal for monitoring in industrial applications.


The RedFox 5500 series is powered by the next generation WeOS operating system, which ensures robust operation and support for an expanding range of protocols and features. In addition, recognizing the growing sophistication of cyberattacks, an extensive suite of cyber security tools is available.

The switches are also prepared for routing acceleration, extended cybersecurity and time synchronization IEEE 1588v2 applications, making them an ideal solution to meet future security and bandwidth requirements.

¹Released in 2nd phase

Specifications - RedFox-5528

Dimensional drawing

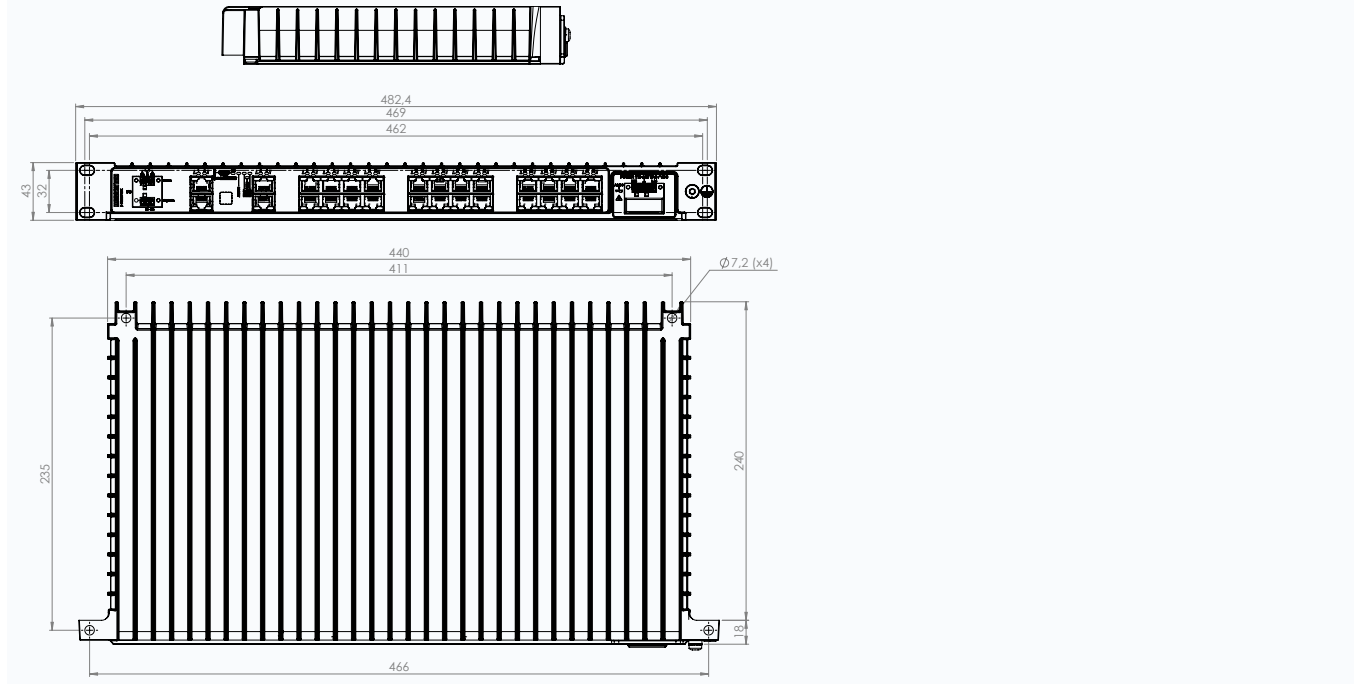

Housing

Dimensions (W x H x D)	482,4 x 43 x 258 mm (18.99 x 1.69 x 10.16 inches)
Housing	Full metal
Weight	3.8 kg

Interface	RedFox-5528-T28G	RedFox-5528-F4G-T24G	RedFox-5528-F16G-T12G
RJ-45 copper ports 10/100/1000 Mbit/s	28	24	12
SFP 100/1000 Mbit/s		4	16
Console micro USB	1	1	1
Micro SD	1	1	1
I/O (1 digital in, 1 digital out)	1	1	1

Power parameters	RedFox-5528 LV	RedFox-5528 MV	RedFox-5528 HV
Rated voltage	24 to 48 VDC	48 to 110 VDC	110 to 240 V AC/DC
Operating voltage	18 to 60 VDC	36 to 154 VDC	85 to 264 V AC/DC
Rated current, all T28G models	1.10 A at 24 VDC 0.54 A at 48 VDC	0.52 A at 48 VDC 0.24 A at 110 VDC	0.14 A at 240 V AC/DC 0.27 A at 110 V AC/DC
Rated current, all T24G models	1.20 A at 24 VDC 0.55 A at 48 VDC	0.54 A at 48 VDC 0.24 A at 110 VDC	0.14 A at 240 V AC/DC 0.27 A at 110 V AC/DC
Rated current, all T12G models	1.30 A at 24 VDC 0.64 A at 48 VDC	0.65 A at 48 VDC 0.28 A at 110 VDC	0.16 A at 240 V AC/DC 0.31 A at 110 V AC/DC
Dual input	◆	◆	
Galvanic isolation to all ports	◆	◆	◆

Models	RedFox-5528 LV	RedFox-5528 MV	RedFox-5528 HV
--------	----------------	----------------	----------------

Environmental			
Temperature, operating: -40 to +74°C (-40 to +165°F)	◆	◆	
Temperature, operating: -40 to +70°C (-40 to +158°F)			◆
Temperature, storage and transport: -50 to +85°C (-58 to +185°F)	◆	◆	◆
Ingress protection: IP40	◆	◆	◆
Humidity, operating: 5-95% relative humidity	◆	◆	◆
Corrosive gases: IEC 60068-2-60	◆	◆	
Altitude: 2000 mA/70 kPA	◆	◆	◆

MTBF hours			
Telcordia, all T28G models	620.000 hours	643.000 hours	653,000 hours
Telcordia, all T24G models	643.000 hours	667.000 hours	678,000 hours
Telcordia, all T12G models	706.000 hours	735.000 hours	710,000 hours

Approvals EMC			
EN 61000-6-1	◆	◆	
EN 61000-6-2	◆	◆	◆
EN 61000-6-3	◆	◆	
EN 61000-6-4	◆	◆	◆

Approvals EMI			
FCC Part 15.105 class A			◆
FCC Part 15.105 class B	◆	◆	

Approvals Marine			
DNV GL rules for classification - Ships and offshore units	◆	◆	

Approvals Safety			
EN/IEC/UL 62368-1	◆	◆	
EN/IEC/UL 61010-1, 61010-2-201			◆

Approvals Trackside			
EN 50121-4	◆	◆	◆
IEC 62236-4	◆	◆	◆

Switch properties	
Number of VLAN	64
Priority queues	8

Software	
WeOS	https://www.westermo.com/solutions/weos
WeConfig	https://www.westermo.com/solutions/weconfig

Warranty	
Validity	5 years

Art.no.	Product	WeOS standard	WeOS extended
3641-4500	RedFox-5528-T28G-LV	◆	
3641-4510	RedFox-5528-F4G-T24G-LV	◆	
3641-4520	RedFox-5528-F16G-T12G-LV	◆	
3641-4505	RedFox-5528-T28G-MV	◆	
3641-4515	RedFox-5528-F4G-T24G-MV	◆	
3641-4525	RedFox-5528-F16G-T12G-MV	◆	
3641-4508	RedFox-5528-T28G-HV	◆	
3641-4518	RedFox-5528-F4G-T24G-HV	◆	
3641-4528	RedFox-5528-F16G-T12G-HV	◆	
3641-4400	RedFox-5528-E-T28G-LV	◆	◆
3641-4410	RedFox-5528-E-F4G-T24G-LV	◆	◆
3641-4420	RedFox-5528-E-F16G-T12G-LV	◆	◆
3641-4405	RedFox-5528-E-T28G-MV	◆	◆
3641-4415	RedFox-5528-E-F4G-T24G-MV	◆	◆
3641-4425	RedFox-5528-E-F16G-T12G-MV	◆	◆
3641-4408	RedFox-5528-E-T28G-HV	◆	◆
3641-4418	RedFox-5528-E-F4G-T24G-HV	◆	◆
3641-4428	RedFox-5528-E-F16G-T12G-HV	◆	◆

Accessories	
3125-0150	PS-60, power supply, DIN-mounted (available for LV and MV models)
100 Mbit transceivers	https://www.westermo.com/products/accessories/sfp-transceivers/100m-sfp-transceivers
Gbit transceivers	https://www.westermo.com/products/accessories/sfp-transceivers/1gbit-sfp-transceivers
WeConfig	https://www.westermo.com/products/software/weconfig

Specification WeOS 5

The WeOS operating system has been developed by Westermo for its current as well as future range of Ethernet hardware products. This layer 2 and layer 3 switching solution enables Westermo to create complex multimedia ring networks and routing solutions. WeOS not only provides solutions to many challenging industrial networking issues, but also helps to protect investments by ensuring the future availability of fully compatible solutions. WeOS is the core of our latest ranges of Ethernet hardware allowing complex multimedia ring networks and routing solutions to be created.

Westermo has many years of experience developing products for industrial applications. At the heart of all Westermo networking solutions is the need for ease of use. By standardising on a single operating system for all Westermo Ethernet products this helps to simplify the installation, operation and maintenance of individual devices and complete networks. Once a user is familiar with a Westermo product, that knowledge can be readily applied to all our other devices. A web screen simplifies the configuration of many functions, whilst a command line interface allows for fine tuning.

WeOS Standard - Layer 2 protocols and functionality
Resilience and High Availability FRNTv0 ring topologies (rings, ring coupling and horseshoe topologies), IEEE 802.1D/802.1w (RSTP), IEEE 802.1AX/802.3ad Link Aggregation (LACP and Static), IEC 62439-2 Media Redundancy Protocol (MRP) ^a
Layer 2 Switching IEEE 802.1D MAC Bridges, IEEE 802.1Q Static VLAN and VLAN Tagging, IEEE 802.1AB LLDP, IGMPv1/v2/v3 Snooping, Static Multicast MAC filters
Layer 2 QoS IEEE 802.1p Class of Service with flexible classification (VLAN tag priority, IP DSCP/ToS, Port ID), Ingress and Egress Rate limiting
IP Host Services Static IP Address, DHCP Client, DNS Client, DDNS, ZeroConf (mDNS and SSDP), NTP Client (NTPv4), IP Interfaces (Ethernet, VLAN, Loopback and Blackhole)
Network Servers DHCP Server (including options 1, 3, 6, 7, 12, 15, 42, 61 and 82), DHCP Relay Agent (including options 54 and 82), DNS Proxy Server (DNS forwarder and Host records), NTP server (NTPv4)
Management Tools Westermo configuration tool WeConfig, Web interface (HTTP and HTTPS), Command Line Interface (CLI) via console port, SSHv2 and Telnet, SNMPv1/v2c/v3, Secure Copy (SCP) for remote file upload and download, Local file management (via HTTP, FTP, TFTP and SCP), Load/save files from/to external memory, Configuration and Deployment using external memory, Tech support button, Flexible alarm and event handling system, RFC5424/RFC3164 Syslog (log files and remote syslog server), Port monitoring
SNMP MIB Support (read-only) RFC 1213 MIB-2, RFC 2819 RMON MIB, RFC 2863 Interface MIB, RFC 3433 Entity Sensor MIB, RFC 3635 Ether-like Interface MIB, RFC 4133 Entity MIB, RFC 4188 Bridge MIB, RFC 4318 RSTP MIB, RFC4363 Q-BRIDGE MIB, RFC 4836 MAU MIB, IEEE 802.1AB LLDP MIB, IEEE 802.1AX LAG MIB, WESTERMO-DDM MIB (SFP), WESTERMO-EVENT MIB, WESTERMO-FRNT MIB, WESTERMO-INTERFACE MIB

^aAvailable as add-on-function. Please see your local Westermo sales contact to purchase a license for your product.

WeOS Extended - Layer 3 protocols and functionality ^a
IP Host Services IP Interfaces (SSL, VPN, GRE)
IP Routing and VPN Static IP Routing, Floating Static Routes, Multinetting, Proxy ARP, Dynamic IP routing (OSPFv2, RIPv1/v2), VRRPv2/v3, Static Multicast Routing, Stateful Inspection Firewall, IP Masquerading (NAT/NAPT), Port Forwarding, Stateless NAT (1-1 NAT), SSL VPN (Client and Server, Certificate Authentication, Pre-shared Key (PSK) Point-to-Point Mode, Layer-2 and Layer-3 VPN, Layer-2 VPN bridging, Address pool and address per CN, TLS Authentication), Generic Routing Encapsulation (GRE)
SNMP MIB Support (read-only) RFC 2787 VRRPv2 MIB, RFC 6527 VRRPv3 MIB

^aProducts with software level WeOS Extended include all functionality listed for WeOS Standard